


INDUSTRIAL WATER EQUIPMENT

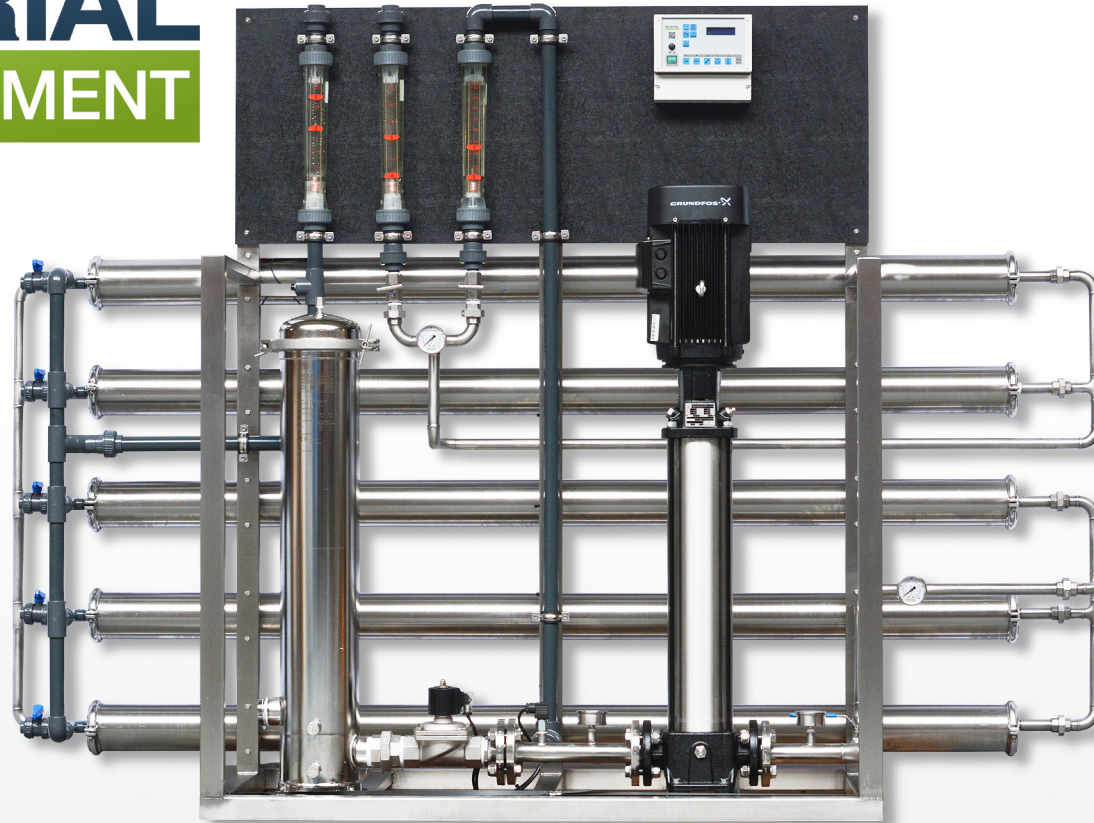

- Manufactured in the UK
- Unbeatable Recovery & Efficiency
- 316 Stainless Steel Frame & Pipework
- Fully Programmable
- 2 Line LED Display
- Customisable Colour and Logo
- Stainless Solenoids and Control Valves
- Stainless Membrane Housing and End Caps
- Stainless Inlet Filter
- Fully Factory Tested and Set Up to your spec
- IP65 Rated
- Compatible with One Flow Technology

Industrial Water Equipment Ltd

RAVENSTOR ROAD, WIRKSWORTH, DERBYSHIRE, DE4 4FY

+44 (0) 1629 363311

SPECIFICATION - PROMAX 4

MODEL PROMAX 4		2000	2500	3000	3500
Permeate flow rate	l/h	2,000	2,500	3,000	3,500
Min. salt rejection	%	97	97	97	97
Recovery	%	80	80	80	80
Operating pressure	bar	14	14	14	14
Membrane element / number		4040/6	4040/8	4040/10	4040/12
Voltage	V/Hz	3 x 400/150	3 x 400/150	3 x 400/150	3 x 400/150
Motor power	kW	1.5	1.5	1.5	1.5
Pre-fusing	A	16	16	16	16
Feedwater connection	BSP	1"	1"	1"	1"
Permeate connection	Plain Union	1"	1"	1"	1"
Concentrate connection	Plain Union	1"	1"	1"	1"
Conductivity range	µS/cm	2 – 200	2 – 200	2 – 200	2 – 200
Min. / max. feed water pressure	bar	2 / 6	2 / 6	2 / 6	2 / 6
Min. / max. feed water temp	°C	5 / 35	5 / 35	5 / 35	5 / 35
Max. ambient temperature	°C	40	40	40	40
pH		3 – 11	3 – 11	3 – 11	3 – 11
Height	mm	1750	1750	1750	1750
Width	mm	2500	2500	2500	2500
Depth	mm	700	700	700	700
Weight approx	ca. kg	800	800	800	800
Code no					